


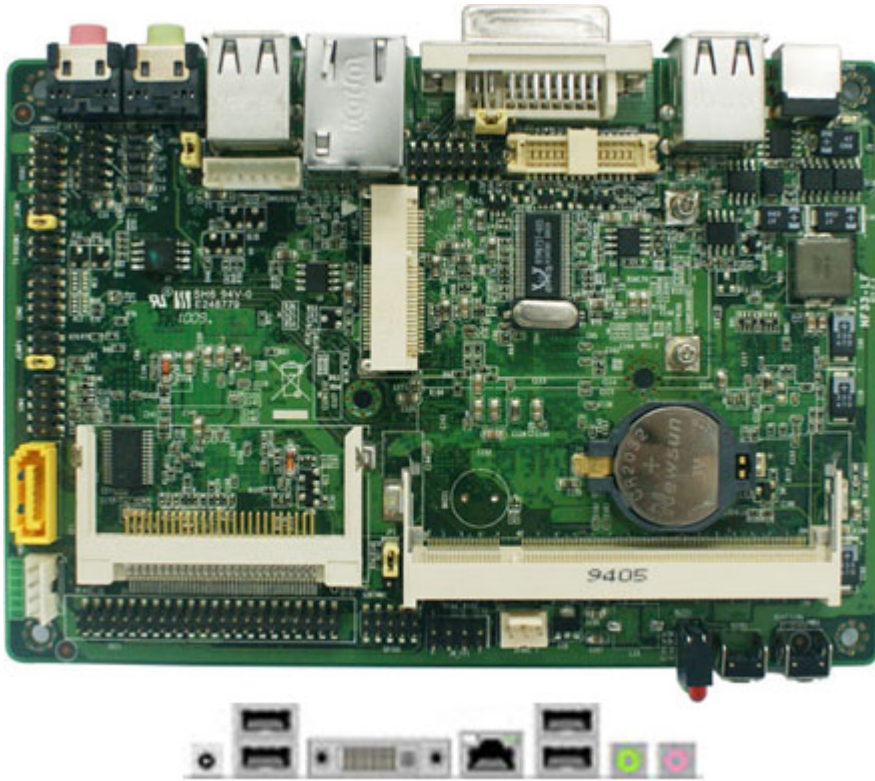

199.00 EUR
incl. 19% VAT, plus [shipping](#)

Support:  [Specifications \[EN\]](#)

- INTEL® 945GSE + ICH7M Chipset
- Support INTEL® ATOMTM N270 processor
- Integrated INTEL® GMA950 graphic processor
- Integrated LVDS support 18-bits dual channel TFT LCD
- Realtek ALC662 HD Audio Codec with 2-Channel
- Onboard Gigabit LAN
- Support Watchdog timer, Support O.V.P
- Support CPU smart FAN
- Support ACPI S3 function
- Compliance with EuP standard
- 148 x 102mm 3.5" SBC Form Factor
- CPU
 - Support INTEL® ATOMTM N270 CPU (45nm,512K cache,1.60GHz,533MHz FSB)
- Chipset
 - INTEL® ATOM 945GSE + ICH7M chipset
- Memory
 - 1 * 240-pin SODIMM Socket for un-buffered single channel DDR2 533MHz SDRAM up to 2GB
- Expansion Slots
 - 1 * MINI PCI-E
- Storage
 - **Embedded ICH7M chipset**
 - 1 * Serial ATA2 3Gb/s connectors
 - 1 * Ultra DMA 100 / 66 IDE header
 - Realtek ALC662 2-Channel HD Audio CODEC
 - Realtek RTL8111DL PCI-E Gigabit Ethernet LAN
 - Onboard 18-bit dual channel LVDS connector
 - Embedded 6* USB 2.0/1.1
 - Support ACPI S3
 - Support CPU Smart FAN
 - Support Watch Dog
- Audio
- Ethernet LAN
- LVDS
- USB
- Special Features

-
- Rear Panel I / O
 - 4 * USB 2.0/1.1 ports
 - 1 * RJ-45 port
 - 2-CH Audio I/O ports (Line-in and line-out)
 - 1 * DVI-I port
 - 1 * 12V DC-IN JACK
 - Internal I / O
 - 1 * USB 2.0/1.1 headers for 2* USB 2.0 ports
 - 1 * VGA header
 - CPU / NB / Chassis Fan connectors;
 - 1 * 32-pin LVDS headers & 1 * GPIO header & 1 * CF card reader socket
 - 2 * COM header
 - 1 * AUDIO header& DIY switch x2 (reset & power button)
 - BIOS
 - Award 8MB SMT Flash ROM
 - Functional
 - ATM, Automation, medical Equipment, Security, General Application, Transportation
 - Form Factor
 - 3.5" SBC form factor (148mmx102mm)
 - Certificate
 - CE,FCC,RoHS,ERP
 - Temperature
 - Operating within 0~60 centigrade
 - Storage within -20-85 centigrade

Product Accessories

- DVI-I to CRT Converter
- Manual
- CD
- 1x SATA cable
- SATA power cable