


999.00 EUR  
incl. 19% VAT, plus [shipping](#)

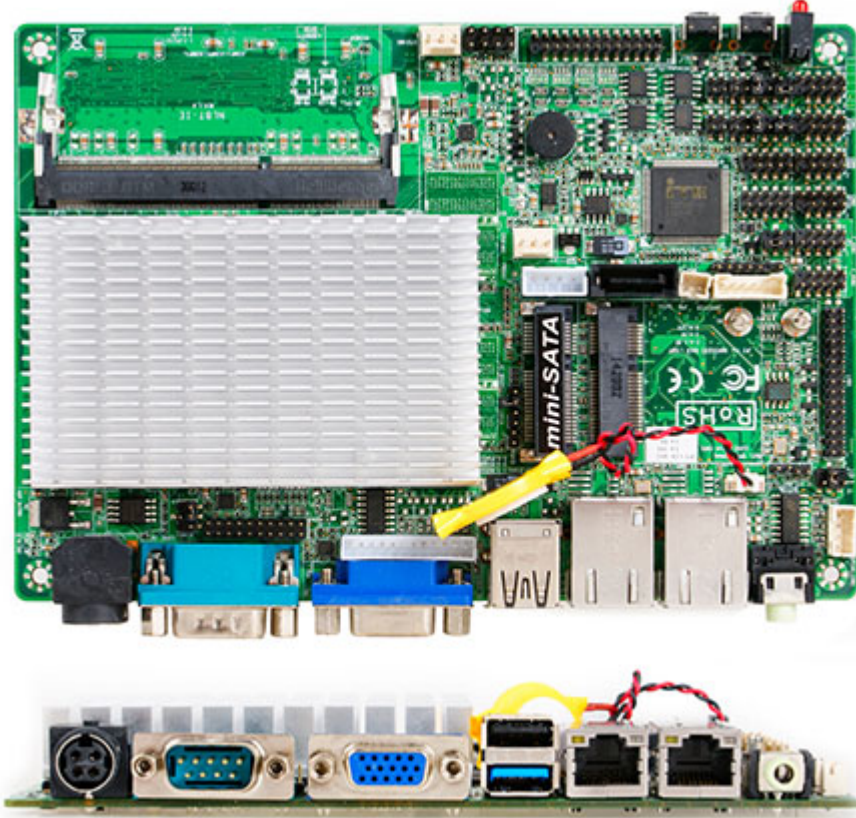

- [INTEL®](#) BayTrail-M N2930 SOC Chipset
- Onboard INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU
- Support DirectX 11 3D Graphics Acceleration
- Integrated HD Audio CODEC
- Support 2\* Gigabit LAN
- Support 1\*SATA2.0
- Support 6\*COM ports
- Support 5\*USB2.0 ports
- Support 1\*USB3.0 port
- Support SIM Card Socket
- Support 24-bit Dual channel
- Onboard 1\*MiniPCI-E connector(Half size)
- Onboard 1 \*M- SATA connector(Full size)
- Support G-sensor Function
- Support TP Connector
- All Tantalum Capacitor design
- Support power onboard(wide voltage input :9~24V)
- Form Factor(165mm X115mm)

<b>CPU</b>	<ul style="list-style-type: none"> <li>• On board INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU</li> <li>• 2 Phase CPU Power Support</li> </ul>
<b>Chipset</b>	• INTEL® BayTrail-M 11900/N2930 SOC Chipset
<b>I.O Chipset</b>	• I1E I18786E
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 1* SO-DIMM slot</li> <li>• Support DDR3L 1333</li> <li>• Max. capacity of system memory up to 8GB</li> </ul>
<b>Expansion Slots</b>	• 1* Mini PCI-E connector(Half size)

• <b>Storage</b>	<ul style="list-style-type: none"> <li>• 1* Serial ATA2 3Gb/s connector</li> <li>• 1* <a href="#">M-SATA Connector</a>(Full size)</li> </ul>
• <b>Audio</b>	<ul style="list-style-type: none"> <li>• ALC887 Audio CODEC</li> <li>• HD Audio CODEC</li> </ul>
• <b>Ethernet LAN</b>	<ul style="list-style-type: none"> <li>• 2* GIGALAN</li> <li>• Intel i211AT Chip</li> </ul>
• <b>LVDS</b>	<ul style="list-style-type: none"> <li>• Onboard 24-bit Dual channel</li> </ul>
• <b>USB</b>	<ul style="list-style-type: none"> <li>• 5* USB 2.0/1.1(1 distribute in back panel, 4 distribute in mid-board)</li> <li>• 1* USB3.0 (distribute in back panel)</li> </ul>
• <b>Special Features</b>	<ul style="list-style-type: none"> <li>• Support G-Sensor Function</li> <li>• Support TP Connector</li> <li>• Support CPU Smart Fan</li> <li>• Support Watch dog Technology</li> <li>• Support GPIO Technology</li> <li>• Support Power Onboard (9~24v wide voltage input)</li> <li>• Support VGA header</li> <li>• Support 1*20-pin HDMI header</li> <li>• Support SIM Card socket</li> <li>• Support 2*RS422/RS485/RS232 for COM2&amp;COM3</li> <li>• Support Amplifier function(3W)</li> <li>• Support Power&amp; Reset Button</li> <li>• All Tantalum Capacitor design</li> <li>• <a href="#">All Power Pack MOSFET design</a></li> </ul>
• <b>Back Panel I / O</b>	<ul style="list-style-type: none"> <li>• 1* DC-JACK(Co-lay 4-pin Power connector)</li> <li>• 1* USB2.0/1.1 port</li> <li>• 1* USB3.0 port</li> <li>• 2* RJ-45 ports</li> <li>• 1* COM port</li> <li>• 1* Line-out connector</li> <li>• 1* VGA port</li> </ul>
• <b>Internal I / O</b>	<ul style="list-style-type: none"> <li>• 2* USB 2.0/1.1 headers for 4 USB 2.0/1.1 ports</li> <li>• 1* CPU / Chassis Fan connector</li> <li>• 2* System Fan connectors</li> <li>• 5* COM headers (Support RS485/RS422/RS232 for COM2&amp;COM3)</li> <li>• 1* Parallel header</li> <li>• 1* 4-pin SATA Power connector</li> <li>• 1* 12-pin VGA header</li> <li>• 1* 20-pin HDMI header</li> <li>• 1* 24-bit Dual Channel LVDS header</li> <li>• 1* 4-pin Amplifier header</li> <li>• 1* GPIO header</li> <li>• 1* Mini PCI-e connector</li> <li>• 1* M-SATA connector</li> <li>• 1* SATA2.0 connector</li> <li>• 1* 4-pin PS/2 header</li> </ul>
• <b>BIOS</b>	<ul style="list-style-type: none"> <li>• AMI 64MB DIP Flash ROM</li> </ul>
• <b>Form Factor</b>	<ul style="list-style-type: none"> <li>• EPIC Form Factor(165mm X 115mm)</li> </ul>