


3498.00 EUR
incl. 19% VAT, plus [shipping](#)

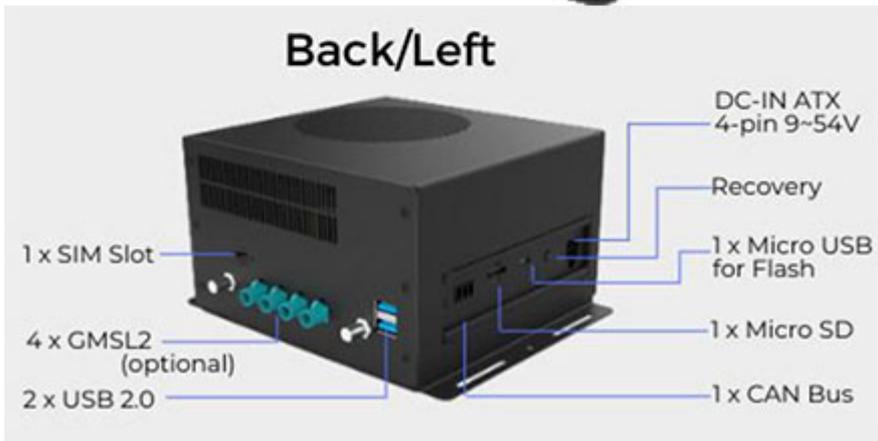

Support: [Jetpack 6 Installation](#)

- 120-pin high speed connector for MIPI SerDes cameras, such as GMSL2/FPD-linkIII/V-by-One® HS, to deploy in AMRs application
- 1x GbE & 1x 10G RJ-45 ethernet for dozens of IPcameras streaming simultaneously in smart security application
- 10GigE Vision camera connector for smart inspection and 1xPCIe slot for multi-function expansion.
- 1xM.2.Ekey for Wi-Fi6E, 1xMPCIe for 4G & 5G with adaptercard, and 1xM.2 Mkey for SSD and capture
- Operating temperature: -25°C ~ 70°C (fan)/ -25°C~60°C (Fanless)
- Dimension: 181.5mm(W) x 137mm(L) x 88mm(H)

MIPI Camera

Raspberry Pi (2Lane/15-pin)

Raspberry Pi camera v2

1. B-04: IMX179 (8M) MIPI, 1080P (30fps)
 2. C-04: IMX290 (2M) MIPI, 1080P (30fps)
 3. C-05: IMX290 (2M) +ISP(YUV), 1080P (30fps)
- 1.e-CAM131_CUNX -4K Camera
2. e-CAM50_CUNX -5.0 MP
3. e-CAM24_CUNX -Color Global shutter Camera
- B-03: IMX334 (4K) MIPI, 4K (30fps)

APPRO (2Lane/15-pin)

e-con (2 Lane/1-pin)

APPRO (4 Lane/36-pin)

SerDes Camera

e-con(GMSL2)

oToBrite(FPD-link III)

APPRO (V-by-One® HS)

Specifications

NVIDIA Jetson SoM

STURDeCAM20 2. STURDeCAM25 3.NileCAM21

oToCAM250/ oToCAM206

A-06: IMX334 (4K) V-by-One®HS x1, 4K (30fps)

NVIDIA® Jetson AGX Orin™module (32GB or 64GB)

| | |
|--------------------------------|---|
| Networking | 1x GbE RJ-45 |
| Display Output | 1x 10G RJ-45 |
| Temperature | 1x HDMI 2.0 (3840x2160at 60Hz) Operating temperature -25°C~70°C Storage temperature -40°C ~ 85°C Relative humidity 40 °C @ 95%, Non-Condensing |
| MIPI & SerDes Camera (120-pin) | GMSL2/FPD-link III/V-by-One® HS(optional) 1x USB 2.0 Micro-B for recovery |
| USB | 2x USB 2.0 Type-A 2x USB 3.2 Type-A |
| Audio | Intel HD Audio analog connector |
| Storage | 1x micro-SD card slot <ul style="list-style-type: none">• 40-pin (UART, SPI, CAN, I2C, I2S, GPIOs)• 1x M.2 E key (for Wi-Fi 6E)• 1x M.2M key (for SSD or AVerMediacapture card: CL312H1, CN311-H, CN312SW, CN312MW)• 1x Micro SIM socket• 1xmPCIe(for 4GLTE moduleor5G module via adapter card)• 1x PCIe x16• 1xCANbuswithtransceiver• 120-pin (for MIPI SerDes) |
| Expansion Header | DC in jack on board & ATX 4-pin (54V/2.78A, 9V~54V is recommended) US/JP/EU/UK/TW/AU/CN Fan / Fanless Power and Recovery Support RTC Battery and Battery Life Monitoring by MCU |
| Input Power | 141.5mm (W) x 133.5mm (L) x 29mm (H) |
| Power Cord | CE, FCC, KC |
| Thermal Solution | |
| Buttons | |
| RTC Battery | |
| Dimensions | |
| Certifications | |